

Technical Characteristics




Material	: PBT UL94-VO
Insulation Resistance	: 1,000MΩ min
Voltage Rating	: 250V AC, DC
Current Rating	: 1A AC, DC
Temperature Range	: -25°C ~+85°C
Withstand Voltage	: 800V AC/minute
Colour	: Black or White

RoHS Compliant, Lead Free



3D Image

:

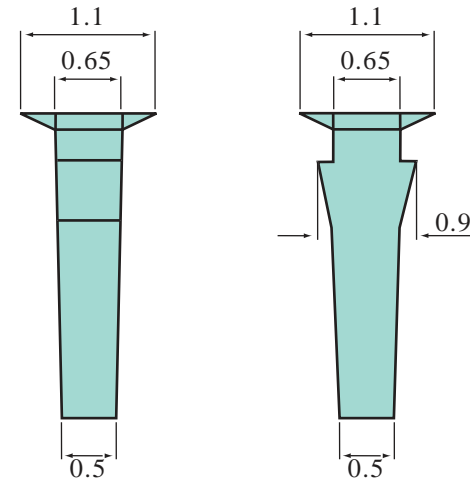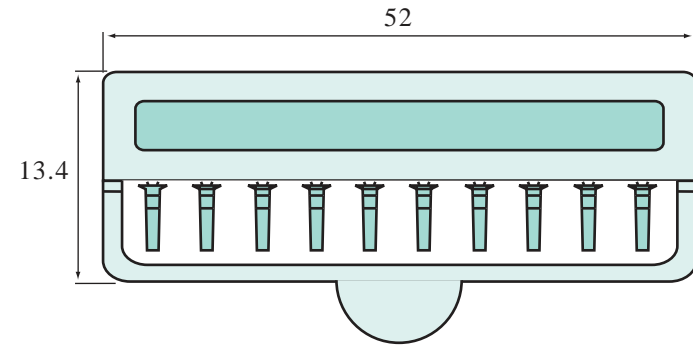

MEMCON Limited
 Compass House Vision Park Chivers Way HISTON Cambridge CB24 9AD
 United Kingdom T +44 1223 257724 F +44 1223 257800
 www.memcon.eu sales@memcon.eu

General Tolerance : ±0.02 Unit : mm

PART NO: MPK101-X	DRAWING NO:	REV	DATE	DRAWN	CHECKED	APPROVED	CUSTOMER IF APPLICABLE	
		A	04/01/13	ER	AB	PC		
DESCRIPTION: Polarizing Key	This document and drawings contains proprietary information which are the property of the Company and shall not be employed, copied, reprinted or disclosed to a third party in any manner, either wholly or in part, without the prior written consent of the Company						DO NOT SCALE DRAWING DIMENSIONS MM	