

Housing MHDF Series


Designed for use on Membrane Switches, Flexible Circuits, Jumper Cables, Sensors, Textile Ribbons etc

Mates with Industry Standard Double Row 0.635mm Pin Headers

Suitable for use with Female Contacts

2.54mm Pitch, Stackable End to End




UL 94V-O Classified

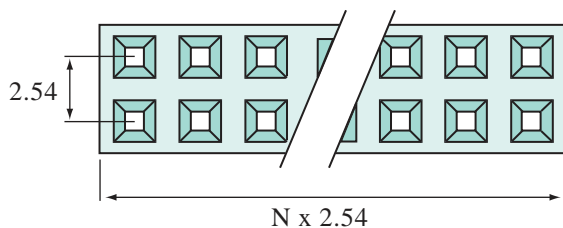

Thermoplastic with Glass Fibre
Contact your Local Office for Application/
Crimping Equipment

Polarized and Latching Variations also Available

RoHS Compliant

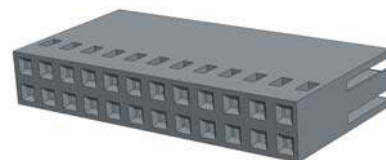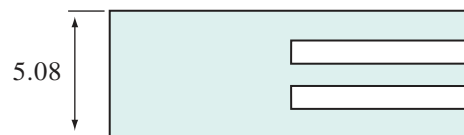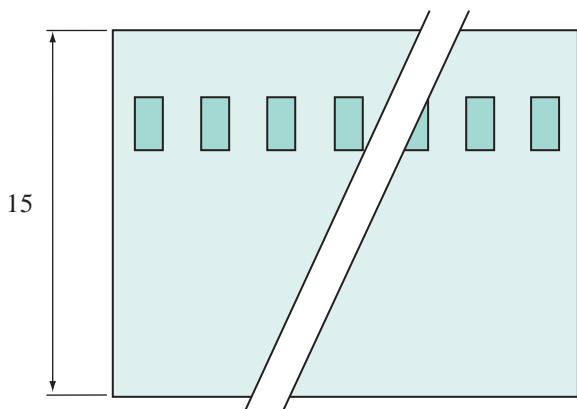

Unit : mm

MHDF

Series

—

XX

No of Ways (4-50)