

NEW



MPTBWSD Series Double Row Walled Latching Straight/Vertical Pin Headers

8-100 Ways Available

Mates with MH937 Housings

Contact 0.40mm Square Pin

Temperature Range -40°C to +125°C

Insulation Resistance 1,000MΩ

Standard Gold Plated on Contact Area



Current Rating 2A AC

Withstanding Voltage 900VRMS



Voltage Rating 300VRMS

PA9T UL 94VO Black

RoHS Compliant




Outline Dimension

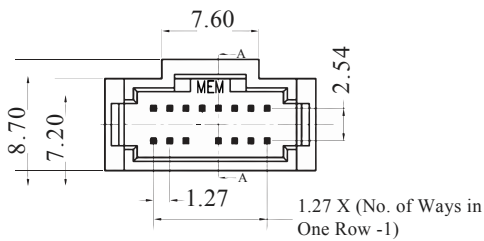


Mating Connector





MH937



1.27 X (No. of Ways in One Row -1) + 4.60



Recommended PCB Layout

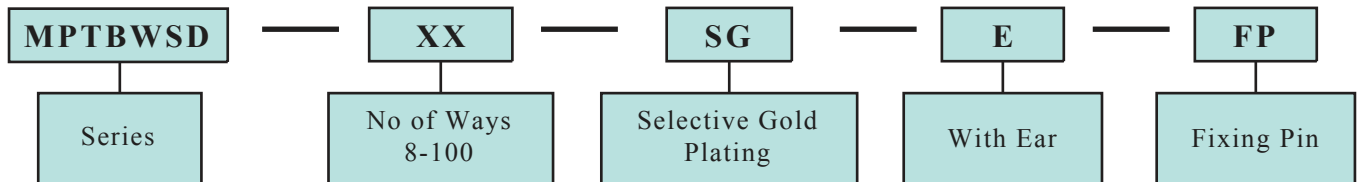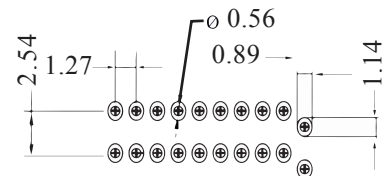

MEMCON (Asia) Limited
 Units 5/6 6/F Westley Square
 48 Hoi Yuen Rd Kwun Tong Hong Kong
 T +852 3741 1411 F +852 3747 8980
 www.memcon.asia sales@memcon.asia
 GB Issue 1

MEMCON Limited
 Unit 8 Campus Five Third Avenue Letchworth
 Hertfordshire SG6 2JF United Kingdom
 T +44 1462 371477 F +44 1462 677499
 www.memcon.eu sales@memcon.eu
 MEMCON[®] is a registered trade mark of Memcon Limited

MEMCON North America
 6000 Red Arrow Hwy Unit
 Stevensville Michigan 49127 USA
 T +1 269 281 0478 F +1 269 593 5952
 www.memcon.net sales@memcon.net