

4 LEG DOME with HOLE

Stable Forces per Batch Number
 Excellent Tactile Effect
 100% Traceability per Batch Number
 Competitive Pricing
 Superior Quality

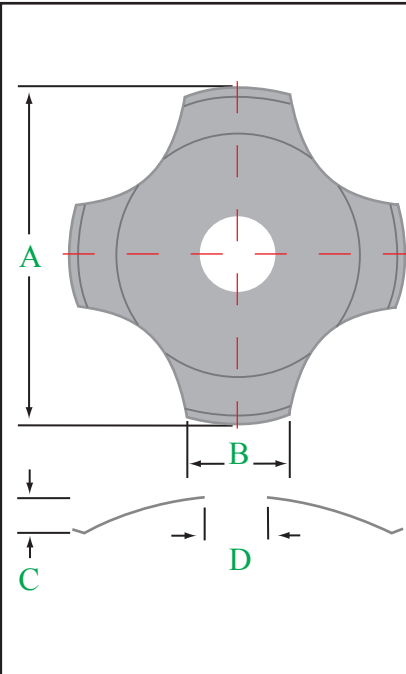
Used in a multitude of Industries, such as:
 Membrane Switch, Automotive, Consumer
 Electronics, Medical, Appliance, etc

Suitable for LED Lighting

RoHS Compliant



Contact Configuration	SPST, Normally Open	Contact Resistance	<100 ohms
Contact Bounce (on)	<0.3ms	with Gold or Silver Plating	<1 ohm
Contact Bounce (off)	<6ms	Voltage/Current Maximum	12mA @ 24 Volts DC, RL
Operating Temperature	-55°C to 125°C	Breakdown Voltage	Over 200 Volts
Storage Temperature	-55°C to 125°C	Material	Stainless Steel Type 304
Humidity	0-97% (no condensation)	Life Expectancy	1 Million

	Part No	Force	Size	Dimensions (mm)				
				Thickness	A	B	C	D Hole Ø
	MD 8.4 4 LEG-H-400	400g	8.4mm	0.10	8.40	1.79	0.48	1.80
	MD 10 4 LEG-H-280	280g	10.0mm	0.10	10.00	2.28	0.52	2.50
	MD 12 4 LEG-H-350	350g	12.0mm	0.10	12.00	2.12	0.65	3.00
	MD 14 4 LEG-H-350	400g	14.0mm	0.12	14.00	2.79	0.72	3.50