

# Crimp Contacts for Membrane Switches and Flexible Circuits

## MHFFC106 Hi Flex Female



2.54mm Pitch

Stable Insertion Force for Flexible Mating Cycles

Suitable for use with MH Series Housings/Wafers

## MLFC506 Low Force Female




2.54mm Pitch

Low Insertion Force for repeated Mating Cycles

Suitable for use with MH Series Housings/Wafers

## MHFC025 High Force Female

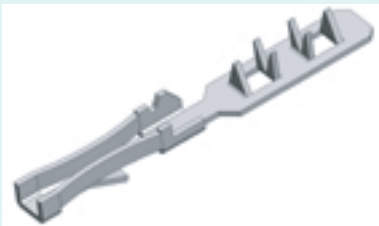

2.54mm Pitch

High Retention for High Vibration Applications

Suitable for use with MH Series Housing/Wafers


## MLFFSC506 Low Force Female Solder



2.54mm Pitch

Designed for Soldering directly to Flexible PCBs or Ultra Thin Rigid PCBs

## MLST241 Long Male Solder Tab



2.54mm Pitch

Can be plugged into a socket

Ideal for Soldering directly into a PCB

## MSST141 Short Male Solder Tab



2.54mm Pitch

Can be plugged into a socket

Ideal for Soldering directly into a PCB

**Other styles of Contacts also available**  
**For Samples, Data or Quotation, please contact us**

**MEMCON (Asia) Limited**  
Units 5/6 6/F Westley Square  
48 Hoi Yuen Rd Kwun Tong Hong Kong  
T +852 3741 1411 F +852 3747 8980  
www.memcon.asia sales@memcon.asia

**MEMCON Limited**  
Unit 8 Campus Five Third Avenue LETCHWORTH  
Hertfordshire SG6 2JF United Kingdom  
T +44 1462 371477 F +44 1462 677499  
www.memcon.eu sales@memcon.eu

**MEMCON North America**  
6000 Red Arrow Hwy Unit I  
Stevensville Michigan 49127 USA  
T +1 269 281 0478 F +1 269 593 5952  
www.memcon.net sales@memcon.net