

NEW



1.27mm Double Row Housing MH938

Designed for use on Membrane
Switches, Flexible Circuits, Jumper
Cables, Sensors, Textile Ribbons etc

Mates with Industry Standard
0.40mm Walled Pin Headers

Suitable for use with Female Contacts

1.27mm Pitch

UL 94V-O Classified




Thermoplastic with Glass Fibre

Contact your Local Office for
Application/Crimping Equipment


Polarized and Latching

Variations also Available

RoHS Compliant

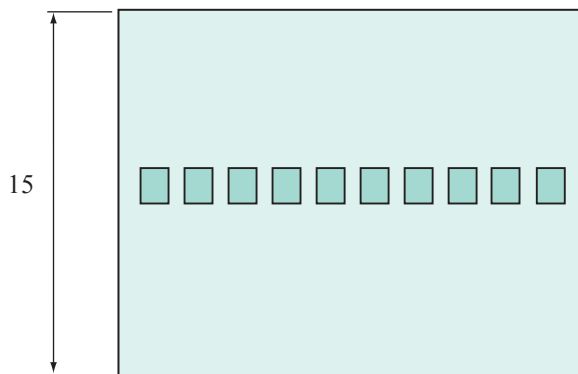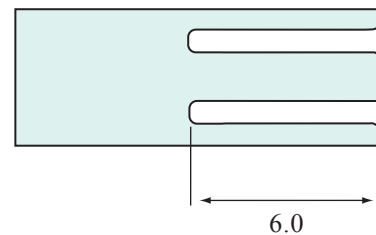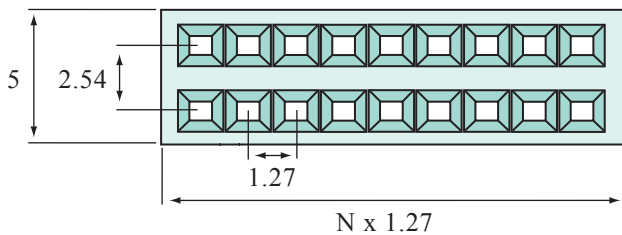

Unit : mm

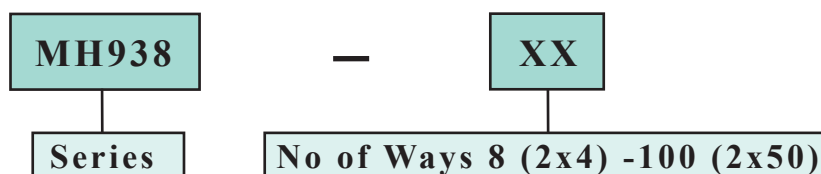

MEMCON (Asia) Limited
Units 5/6 6/F Westley Square
48 Hoi Yuen Rd Kwun Tong Hong Kong
T +852 3741 1411 F +852 3747 8980
www.memcon.asia sales@memcon.asia

MEMCON Limited
Unit 8 Campus Five Third Avenue LETCHWORTH
Hertfordshire SG6 2JF United Kingdom
T +44 1462 371477 F +44 1462 677499
www.memcon.eu sales@memcon.eu

MEMCON North America
6000 Red Arrow Hwy Unit I
Stevensville Michigan 49127 USA
T +1 269 281 0478 F +1 269 593 5952
www.memcon.net sales@memcon.net