

NEW



Polarized & Locking Housing MHD & MHDH Series with Detent

Designed for use on Membrane Switches, Flexible Circuits, Jumper Cables, Sensors, Textile Ribbons etc

Mates with Industry Standard 0.635mm Walled Pin Headers

Suitable for use with Female Contacts

2.54mm Pitch

UL 94V-O Classified

Thermoplastic with Glass Fibre





Contact your Local Office for Application/ Crimping Equipment

Non Polarized and Latching Variations

also Available

MHDH version allows the contacts to be inserted either Up or Down

RoHS Compliant

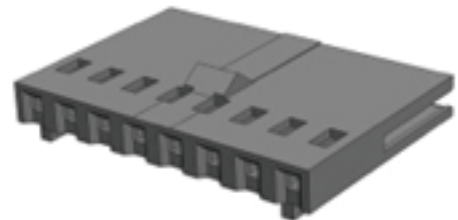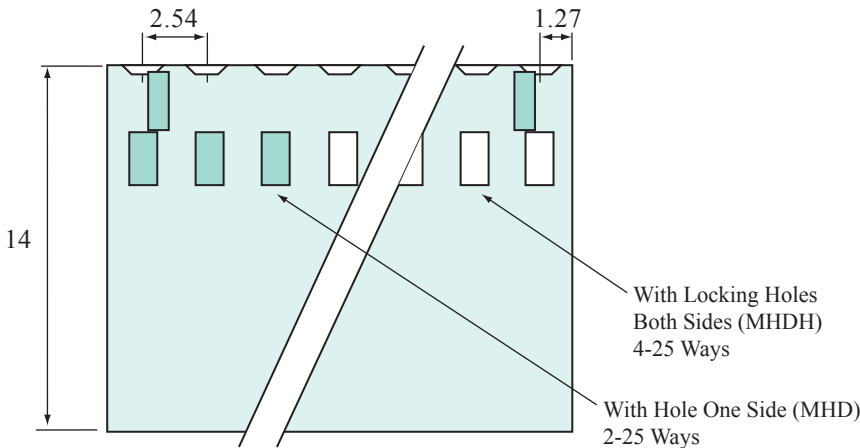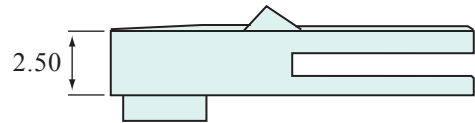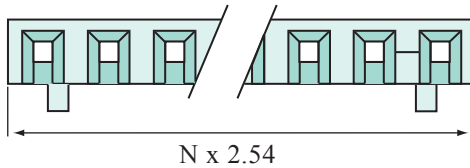

Unit : mm

MHD(Locking Hole 1 side)
MHDH(LockingHoles both sides)

Series

— XX

No of Ways (2-25)

MEMCON (Asia) Limited
Units 5/6 6/F Westley Square
48 Hoi Yuen Rd Kwun Tong Hong Kong
T +852 3741 1411 F +852 3747 8980
www.memcon.asia sales@memcon.asia

GB Issue 4

MEMCON Limited
Unit 8 Campus Five Third Avenue LETCHWORTH
Hertfordshire SG6 2JF United Kingdom
T +44 1462 371477 F +44 1462 677499
www.memcon.eu sales@memcon.eu

MEMCON® is a registered trade mark of Memcon Limited

MEMCON North America
6000 Red Arrow Hwy Unit I
Stevensville Michigan 49127 USA
T +1 269 281 0478 F +1 269 593 5952
www.memcon.net sales@memcon.net