


High Insertion Force Female Contact

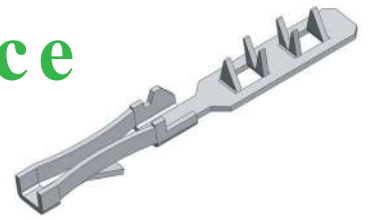

Designed for Crimping to Membrane Switches, Flexible Circuits, Jumper Cables, Sensors, Textile Ribbons etc

Suitable for use with MH Series Housings/Wafers

High Retention for High Vibration Applications (For 2-10 Ways)


2.54mm Pitch, Phosphor Bronze

Tin and Gold Plating as Standard, Others Available Upon Request

Contact your Local Office for Application/ Crimping Equipment

Low Force Contact MLFC506 & High Flex Contact MHFFC106 also available

RoHS Compliant, Lead Free

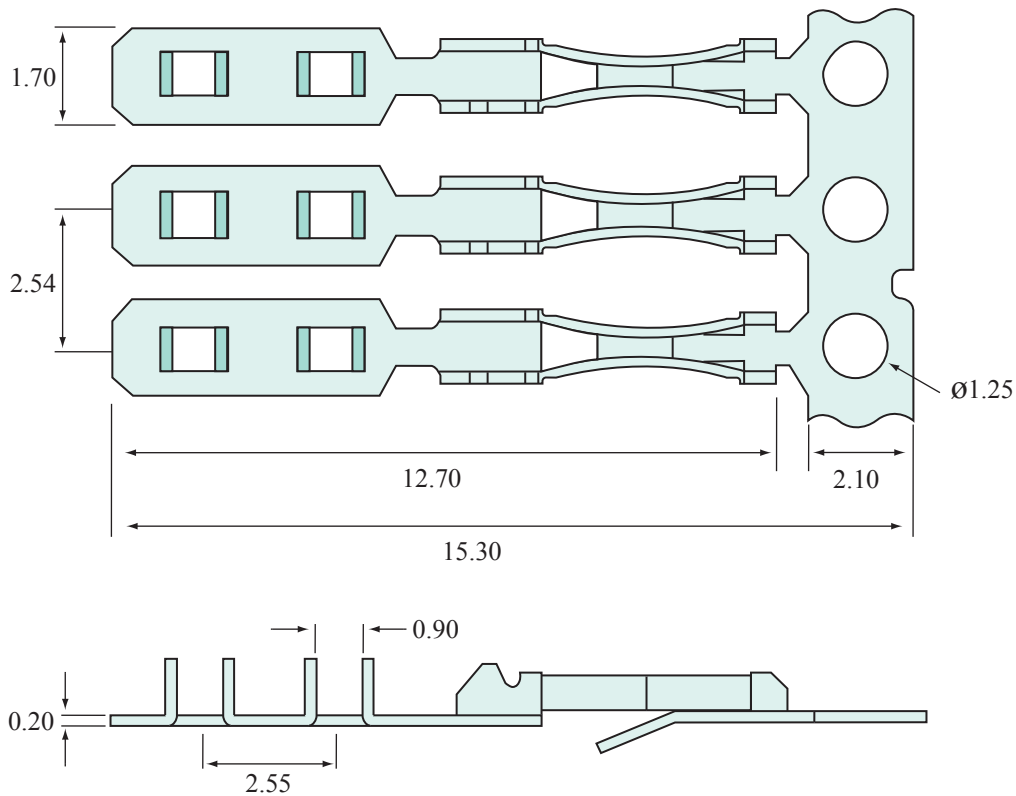

Unit : mm

Part Number	Description	Plating	Reel Quantity
MHFC025-T35	High Insertion Force Female	Tin	35,000
MHFC025-SG35	High Insertion Force Female	Selective Gold	35,000
MHFC025-G35	High Insertion Force Female	Gold	35,000
OTHER PLATING AND REEL SIZES AVAILABLE ON REQUEST			