

**NEW**



# Polarized & Locking Housing MHM & MHMH Series

Designed for use on Membrane  
Switches, Flexible Circuits, Jumper  
Cables, Sensors, Textile Ribbons etc

Mates with Industry Standard  
0.635mm Walled Pin Headers

Suitable for use with Female Contacts

2.54mm Pitch





UL 94V-O Classified

Thermoplastic with Glass Fibre

Contact your Local Office for Application/  
Crimping Equipment

MHMH version allows the contacts to be  
inserted either Up or Down

RoHS Compliant

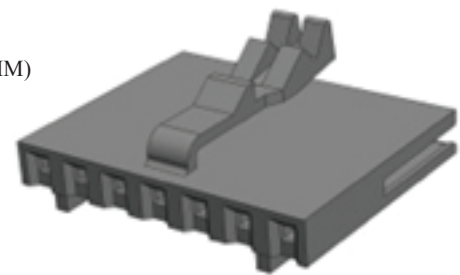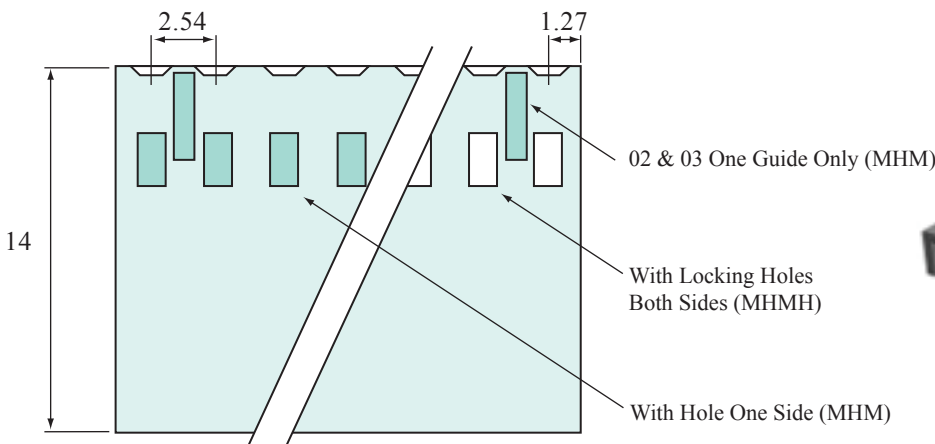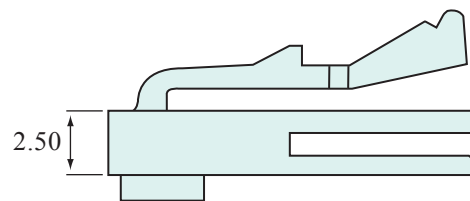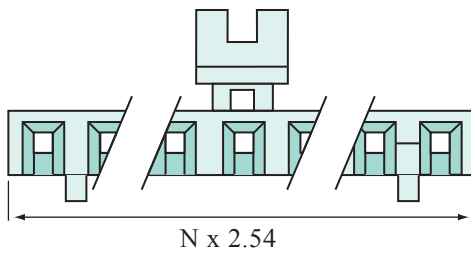

Unit : mm

**MHM** (Locking Hole 1 side)  
**MHMH** (Locking Holes both sides)

**Series**

**XX**

**No of Ways : MHM 2-25  
: MHMH 4-25**

**MEMCON (Asia) Limited**  
Units 5/6 6/F Westley Square  
48 Hoi Yuen Rd Kwun Tong Hong Kong  
T +852 3741 1411 F +852 3747 8980  
www.memcon.asia sales@memcon.asia

**MEMCON Limited**  
Unit 8 Campus Five Third Avenue LETCHWORTH  
Hertfordshire SG6 2JF United Kingdom  
T +44 1462 371477 F +44 1462 677499  
www.memcon.eu sales@memcon.eu  
MEMCON® is a registered trade mark of Memcon Limited

**MEMCON North America**  
6000 Red Arrow Hwy Unit I  
Stevensville Michigan 49127 USA  
T +1 269 281 0478 F +1 269 593 5952  
www.memcon.net sales@memcon.net