

Straight Pin Headers

2-40 Ways Available

Mates with MHF Series Housings

Contact 0.64mm Square Pin

Temperature Range -40°C to +150°C

Current Rating 3A AC, DC


Withstand Voltage 500AC

UL 94VO Black Polyester Insulator

Tin or Gold Plating Available

Insulation Resistance 1,000M Ω

RoHS Compliant

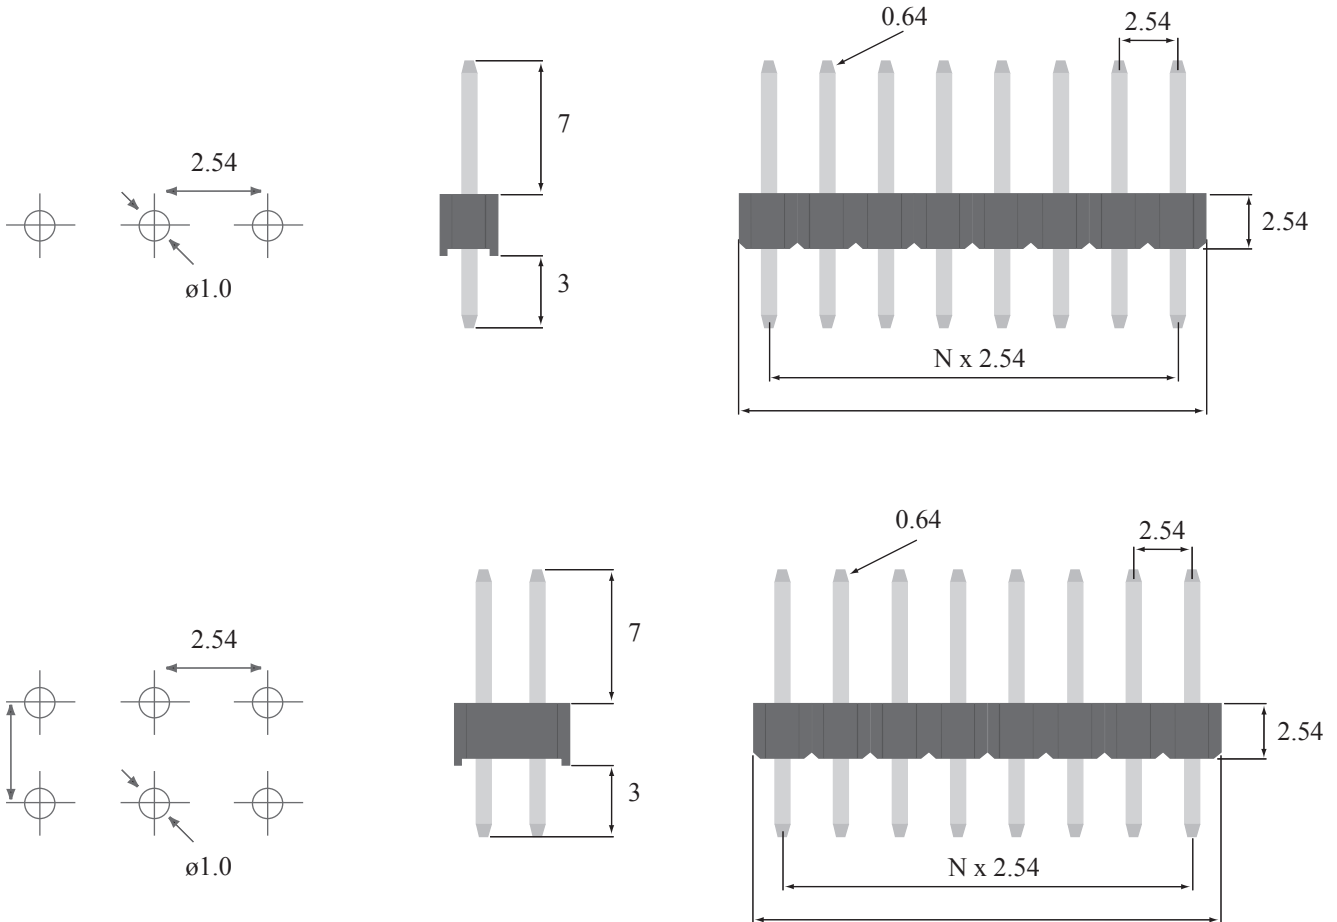

Unit mm

