

NEW









Super Slim SMD Bi-Colour LEDs for Membrane Switches

0.35mm high Super Slim LEDs
ideal for keeping spacer thickness to a
minimum in Membrane Applications

8mm Tape & Reel for Automated Placement

2,000 Pieces per Reel

RoHS Compliant

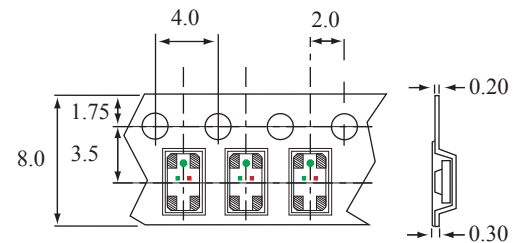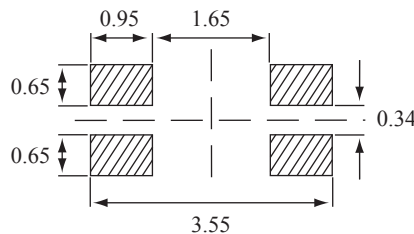

Part Number	Power Dissipation	Peak Forward Current	Pulse Forward Current	Reverse Voltage	Operating Temp Range	Storage Temp Range	Soldering Temp
ML158NN-RGWT	52mW	50mA	50mA	5V	-30°C ~ +85°C	-40°C ~ +100°C	260°C for 10 Sec
	52mW	50mA	50mA	5V	-30°C ~ +85°C	-40°C ~ +100°C	260°C for 10 Sec

Part Number	Lighting Colour	Die Material	V _F			Peak Wavelength typ (nm)	Dominant Wavelength typ (nm)	I _v			Viewing Angle (deg)
			I _F (mA)	typ (V)	max (V)			I _F (mA)	min (mcd)	typ (mcd)	
ML158NN-RGWT	Super Red	AlGaInP	20	2.0	2.6	635	620	20	110	200	130°
	Super Green	AlGaInP	20	2.0	2.6	580	575	20	20	60	130°

MEMCON (Asia) Limited
Units 5/6 6/F Westley Square
48 Hoi Yuen Rd Kwun Tong Hong Kong
T +852 3741 1411 F +852 3747 8980
www.memcon.asia sales@memcon.asia

MEMCON Limited
Unit 8 Campus Five Third Avenue LETCHWORTH
Hertfordshire SG6 2JF United Kingdom
T +44 1462 371477 F +44 1462 677499
www.memcon.eu sales@memcon.eu

MEMCON North America
6000 Red Arrow Hwy Unit I
Stevensville Michigan 49127 USA
T +1 269 281 0478 F +1 269 593 5952
www.memcon.net sales@memcon.net