

**NEW**



# MPTBWS Series Single Row Thru Hole Walled Latching Pin Headers

4-50 Ways Available


Mates with MH545 Housings

Contact 0.40mm Square Pin

Temperature Range -40°C to +125°C

Insulation Resistance 1,000MΩ

Standard Gold Plated on Contact Area



Current Rating 2A AC

Withstanding Voltage 900VRMS


Voltage Rating 300VRMS

PA9T UL 94VO Black



RoHS Compliant




## Outline Dimension



1.27X (No. of Ways-1)+4.60

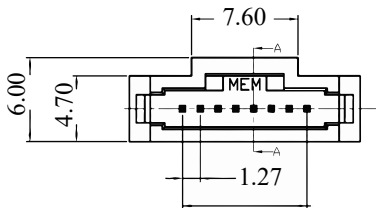

1.27X (No. of Ways-1)





## Mating Connector



MH545

## Recommended PCB Layout

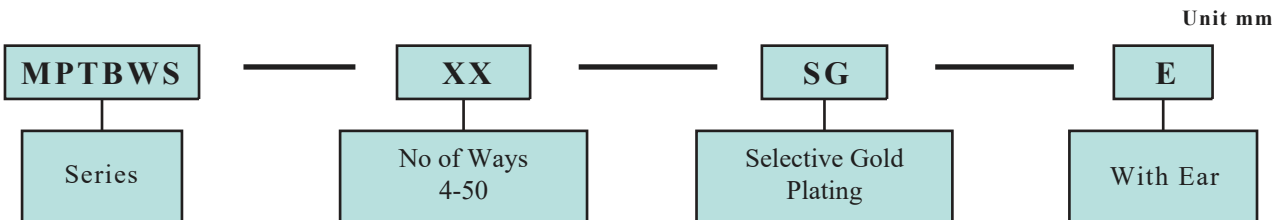

### MEMCON (Asia) Limited

Units 5/6 6/F Westley Square  
48 Hoi Yuen Rd Kwun Tong Hong Kong  
T +852 3741 1411 F +852 3747 8980  
www.memcon.asia sales@memcon.asia  
GB Issue 2

### MEMCON Limited

Unit 8 Campus Five Third Avenue Letchworth  
Hertfordshire SG6 2JF United Kingdom  
T +44 1462 371477 F +44 1462 677499  
www.memcon.eu sales@memcon.eu  
MEMCON<sup>®</sup> is a registered trade mark of Memcon Limited

### MEMCON North America

6000 Red Arrow Hwy Unit  
Stevensville Michigan 49127 USA  
T +1 269 281 0478 F +1 269 593 5952  
www.memcon.net sales@memcon.net