


Hi Flex Female Contact

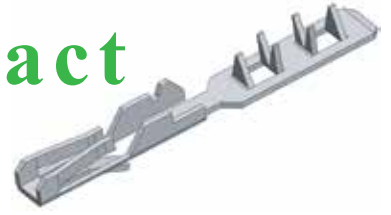

**Designed for Crimping to Membrane
Switches, Flexible Circuits, Jumper
Cables, Sensors, Textile Ribbons etc**

**Suitable for use with MH Series
Housings/Wafers**

**Stable Insertion Force/Contact Res
for Flexible Mating Cycles**


2.54mm Pitch, Phosphor Bronze

**Tin and Gold Plating as Standard,
Others Available Upon Request**

**Contact your Local Office for Application/
Crimping Equipment**

**High Force Contact MHFC025 & Low Force
Contact MLFC506 also available**

RoHS Compliant, Lead Free

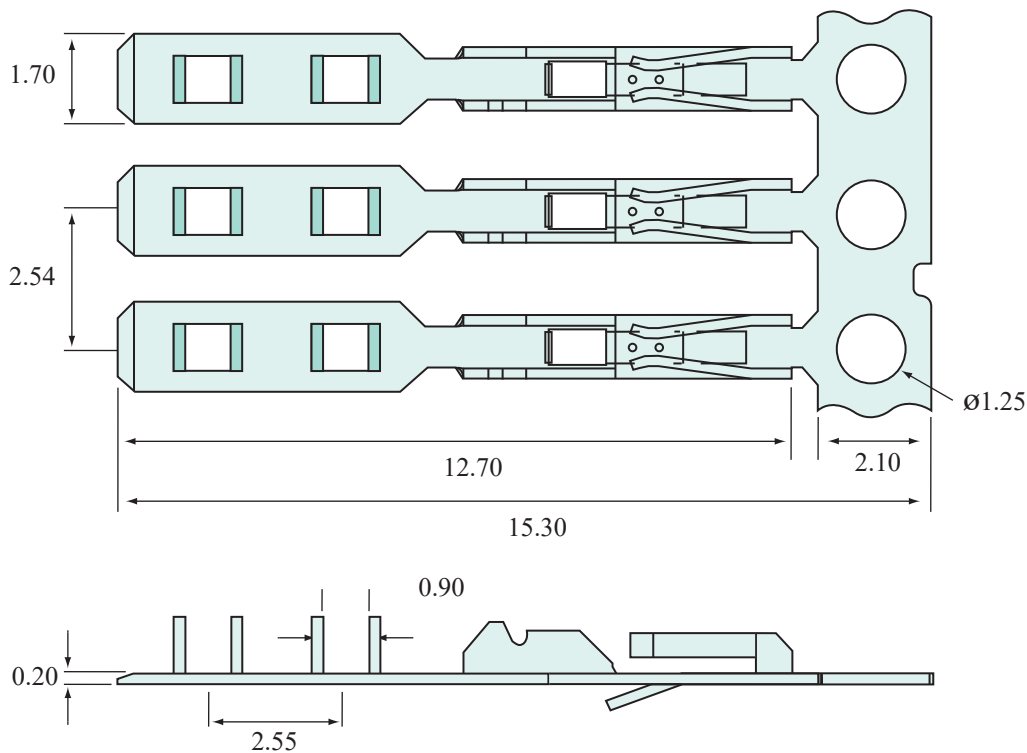

Unit : mm

Part Number	Description	Plating	Reel Quantity
MHFFC106-T35	Hi Flex Female	Tin	35,000
MHFFC106-SG35	Hi Flex Female	Selective Gold	35,000
MHFFC106-G35	Hi Flex Female	Gold	35,000
MHFFC106-SG07535	Hi Flex Female	Sel Gold 30u" 0.75u	35,000
OTHER PLATING AND REEL SIZES AVAILABLE ON REQUEST			