

# Low Insertion Force Female Contact

Designed for Crimping to Membrane  
Switches, Flexible Circuits, Jumper  
Cables, Sensors, Textile Ribbons etc


Tin Plating as Standard,  
Others Available Upon Request

Suitable for use with MH Series  
Housings/Wafers

RoHS Compliant, Lead Free



Low Insertion Force for Repeated  
Mating cycles  
2.54mm Pitch, Phosphor Bronze Contact

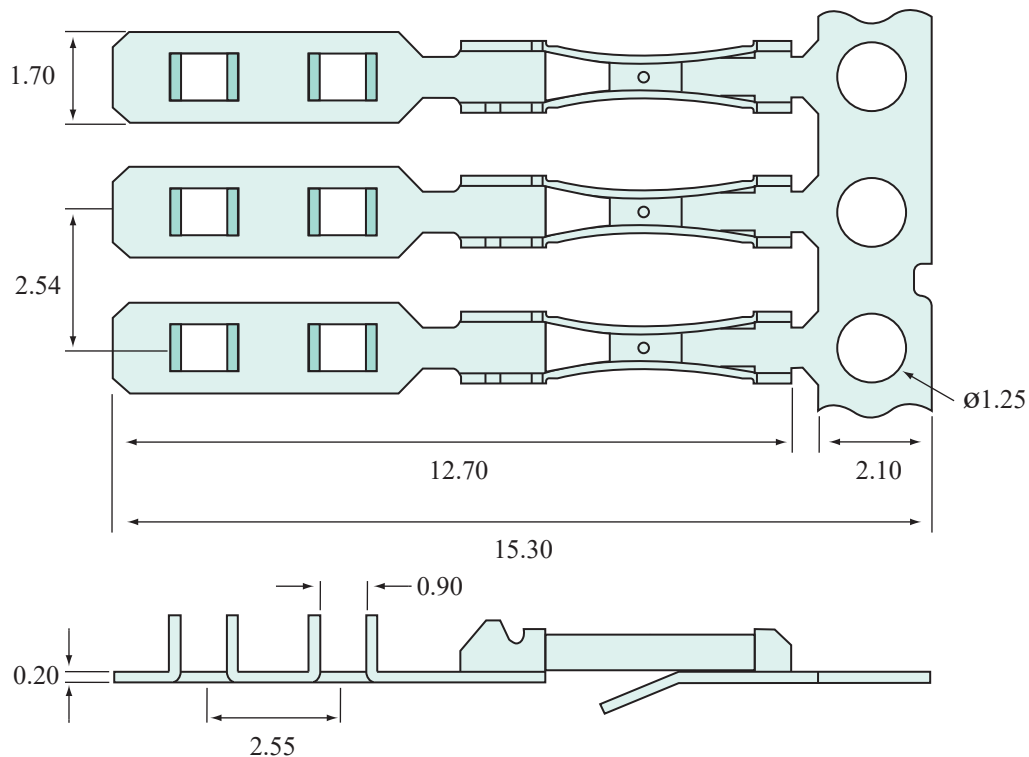

Unit : mm

Part Number	Description	Plating	Reel Quantity
MLFC506-T35	Low Insertion Force Female	Tin	35,000
MLFC506-SG35	Low Insertion Force Female	Selectrive Gold	35,000
MLFC506-G35	Low Insertion Force Female	Gold	35,000
<b>OTHER PLATING AND REEL SIZES AVAILABLE ON REQUEST</b>			