


Technical Characteristics

Material	: Phosphor Bronze
Contact Resistance	: 5 mW Max
Insulation Resistance	: 5.10^5 MW at 500V
Withstanding Voltage	: 1100V
Contact Direct Current Rating	: 3A DC
Contact Alternating Current Rating	: 5A AC
Operating Temperature	: -55°C to +150°C
Capacitance between Two Contacts	: 4pF Max
Plating Options	


Tin (T)	: 2.5 μ Tin over 1.25 μ Nickel
Selective Gold (SG)	: 0.15 μ Gold over 1.25 μ Nickel
Others Available Upon Request	

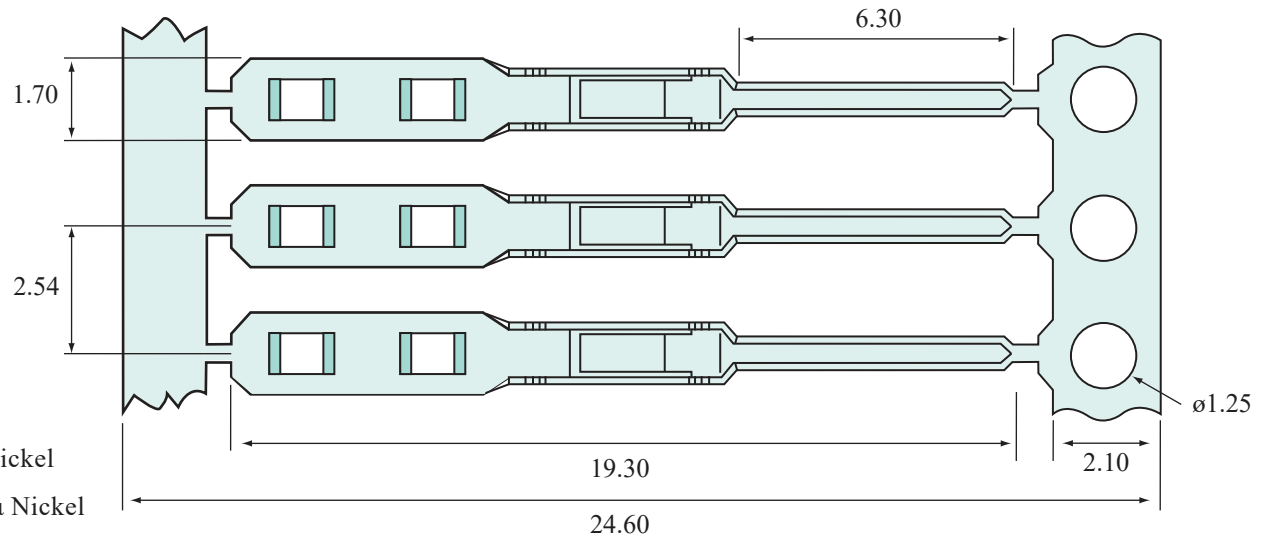

RoHS Compliant, Lead Free



3D Image

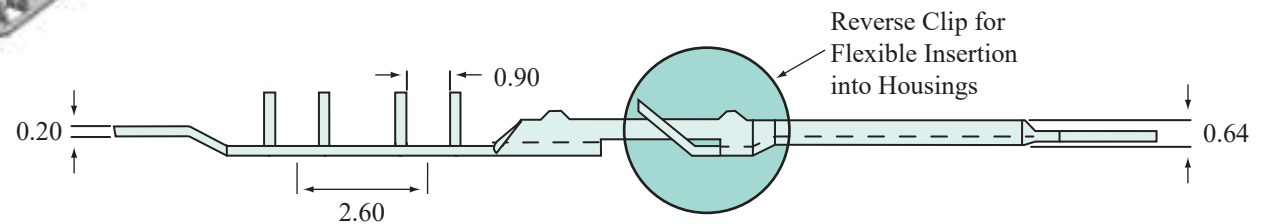

MEMCON Limited
 Unit 8 Campus Five Third Avenue Letchworth Hertfordshire SG6 2JF
 United Kingdom T +44 (0)1462 371477 F +44 (0)1462 677499
 www.memcon.eu sales@memcon.eu

General Tolerance : +/- 0.20 Unit : mm

PART NO: MRSMC756	DRAWING NO:	REV	DATE	DRAWN	CHECKED	APPROVED	CUSTOMER IF APPLICABLE
		B	04/06/12	ER	AB	PC	
DESCRIPTION: Reverse Square Male Contact	This document and drawings contains proprietary information which are the property of the Company and shall not be employed, copied, reprinted or disclosed to a third party in any manner, either wholly or in part, without the prior written consent of the Company						DO NOT SCALE DRAWING DIMENSIONS MM