



Technical Characteristics

Material	: Phosphor Bronze
Contact Resistance	: 5 mΩ Max
Insulation Resistance	: 5.10 ⁵ MΩ at 500V
Withstanding Voltage	: 1100V
Contact Direct Current Rating	: 3A DC
Contact Alternating Current Rating	: 5A AC
Operating Temperature	: -55°C to +150°C
Capacitance between Two Contacts	: 4pF Max
Plating Options	
Tin (T)	: 2.5μ Tin over 1.25μ Nickel
	: 0.15μ Gold over 1.25μ Nickel
	Others Available Upon Request

RoHS Compliant, Lead Free



3D Image

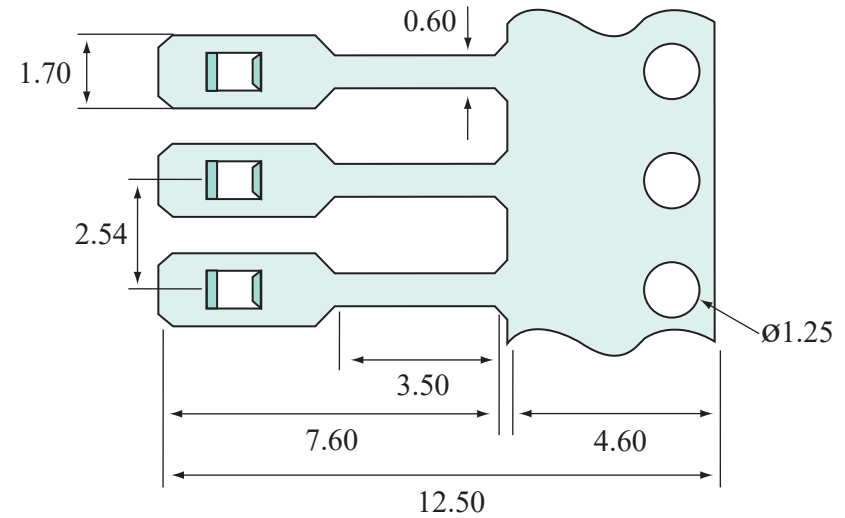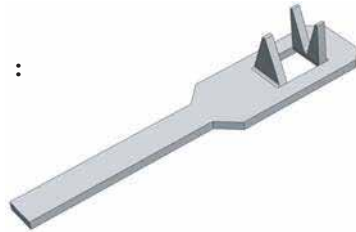

MEMCON Limited
 Unit 8 Campus Five Third Avenue Letchworth Hertfordshire SG6 2JF
 United Kingdom T +44 (0)1462 371477 F +44 (0)1462 677499
 www.memcon.eu sales@memcon.eu

General Tolerance : +/- 0.20 Unit : mm

PART NO:
MSST141-T35

DRAWING NO:	REV	DATE	DRAWN	CHECKED	APPROVED	CUSTOMER IF APPLICABLE
	C	04/02/08	ER	AB	PC	

DESCRIPTION:
Short Male Solder Tab

This document and drawings contains proprietary information which are the property of the Company and shall not be employed, copied, reprinted or disclosed to a third party in any manner, either wholly or in part, without the prior written consent of the Company

DO NOT SCALE DRAWING DIMENSIONS MM