


BLACK & WHITE DOUBLE THICKNESS PRE LAMINATED SPACER TAPE

Our range of high performance spacer tapes have been specifically developed for use in membrane switch applications and associated products. The spacer tapes which utilise high performance adhesive, provide a good level of initial tack and a high level of adhesive strength.

Our double thickness pre laminated spacer tapes are produced to customer order/requirement.

Developed for use in the harshest of conditions, our spacer tapes demonstrate outstanding resistance to hostile environments. They are ideally suited for die-cutting

Sheet sizes of 457 x 610mm (S3), other sizes are available upon request.

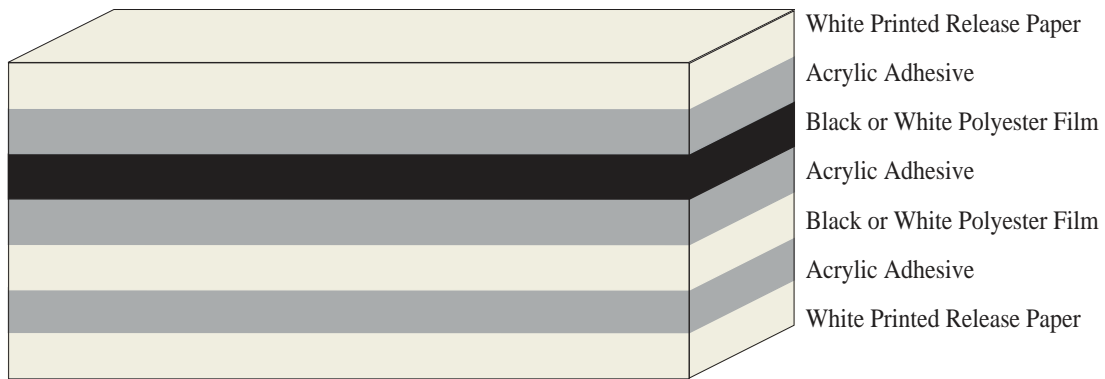

Part Number	Total Thickness mm	Carrier Thickness mm	Adhesive Thickness	Carrier Material/ Colour	Adhesion to Steel N/25mm	Adhesion to PET	Holding Power, 25mm 1kg 25°C	Working Temp	Short Temp
MSDL300-50A50WS3	0.300	0.050/0.050	0.05/0.10/0.05	PET White	≥18	≥16	≥4.5	-30~120°C	200°C
MSDL350-50A50BS3	0.350	0.025/0.125	0.05/0.10/0.05	PET Black	≥18	≥16	≥4.5	-30~120°C	200°C
MSDL450-50A50BS3	0.450	0.125/0.125	0.05/0.10/0.05	PET Black	≥18	≥16	≥4.5	-30~120°C	200°C
MSDL375-50A50W/BS3	0.375	0.050/0.125	0.05/0.10/0.05	PET W/B	≥18	≥16	≥18	-30~120°C	200°C

Other thickness variations together with Black & White Spacers available upon request

The performance characteristics are those results obtained in our laboratory.

Memcon makes no warranties and assumes no liability in connection with any use of this information.

Before adopting our products for commercial use, the user assumes responsibility for determining fitness of use in their particular application and process.