



Polarized & Locking Housing MHD & MHDH Series with Detent

Designed for use on Membrane Switches, Flexible Circuits, Jumper Cables, Sensors, Textile Ribbons etc

Mates with Industry Standard 0.635mm Walled Pin Headers

Suitable for use with Female Contacts

2.54mm Pitch

UL 94V-O Classified

Thermoplastic with Glass Fibre





Contact your Local Office for Application/ Crimping Equipment

Non Polarized and Latching Variations


also Available

MHDH version allows the contacts to be inserted either Up or Down

RoHS Compliant

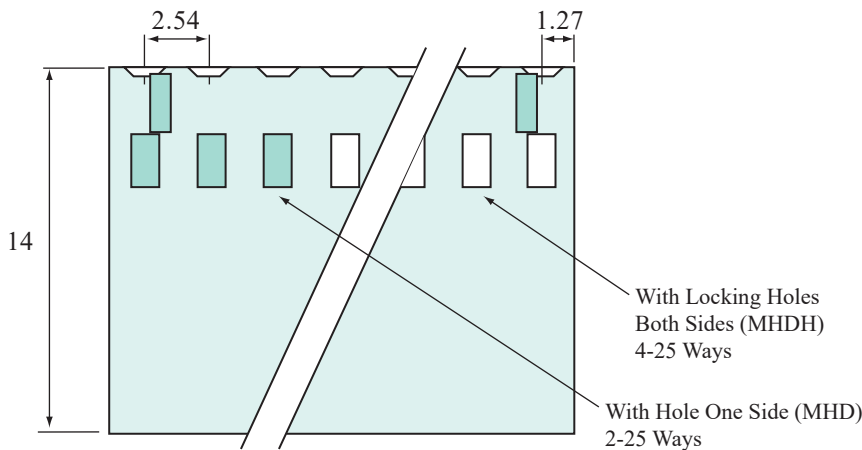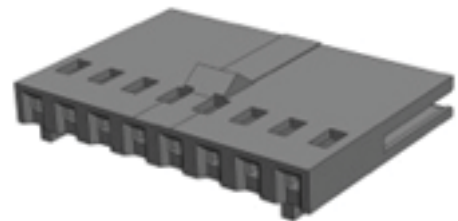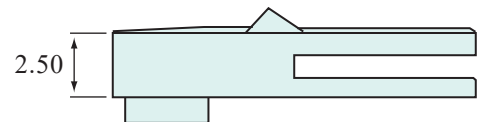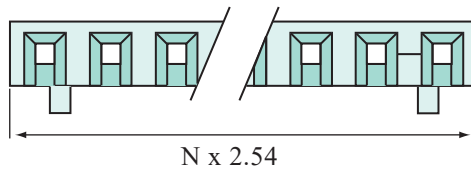

Unit : mm

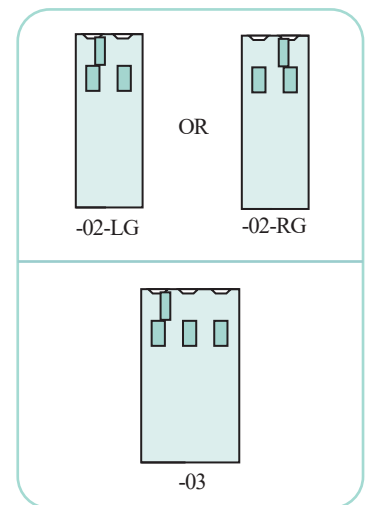

MHD (Locking Hole 1 side)
MHDH (Locking Holes both sides)

Series

XX

No of Ways (2-25)

MEMCON (Asia) Limited
Units 5/6 6/F Westley Square
48 Hoi Yuen Rd Kwun Tong Hong Kong
T +852 3741 1411 F +852 3747 8980
www.memcon.asia sales@memcon.asia

MEMCON Limited
Compass House Vision Park Chivers Way HISTON
Cambridge CB24 9AD United Kingdom
T +44 1223 257724 F +44 1223 257800
www.memcon.eu sales@memcon.eu

MEMCON North America
6000 Red Arrow Hwy Unit I
Stevensville Michigan 49127 USA
T +1 269 281 0478 F +1 269 593 5952
www.memcon.net sales@memcon.net