

Housing with Blanked Out Hole MHF₂BH Series

Designed for use on Membrane Switches, Flexible Circuits, Jumper Cables, Sensors, Textile Ribbons etc

Mates with Industry Standard
0.635mm Pin Headers




Suitable for use with Female Contacts
UL 94V-O Classified

Thermoplastic with Glass Fibre

Contact your Local Office for
Minimum Order Quantity

2.54mm Pitch, Stackable End to End

RoHS Compliant

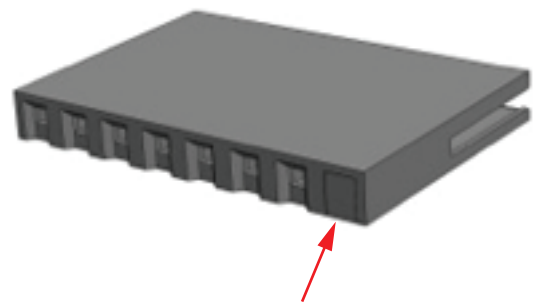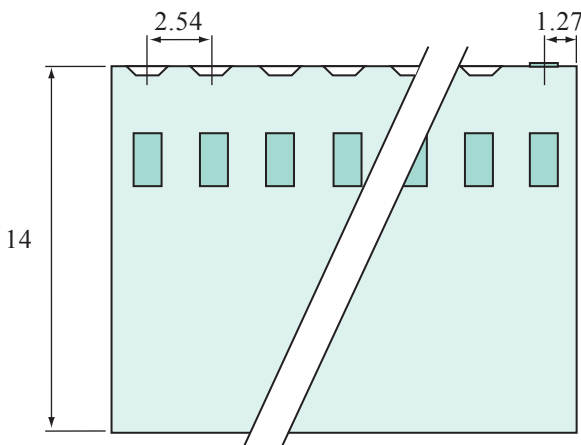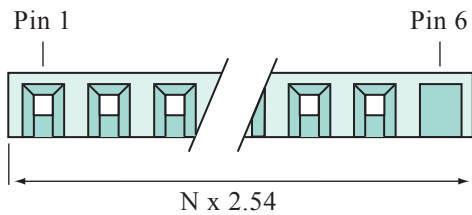

Blanked Out Hole

Unit : mm

MHF₂BH

Series

—

XX

No of Ways
(2-32)

—

YY

Position of
Blanked Hole

EXAMPLE



MHF₂BH-06-06