

NEW



Polarized & Locking Housing MHM & MHMH Series

Designed for use on Membrane
Switches, Flexible Circuits, Jumper
Cables, Sensors, Textile Ribbons etc

Mates with Industry Standard
0.635mm Walled Pin Headers

Suitable for use with Female Contacts

2.54mm Pitch





UL 94V-O Classified

Thermoplastic with Glass Fibre

Contact your Local Office for Application/
Crimping Equipment

MHMH version allows the contacts to be
inserted either Up or Down

RoHS Compliant

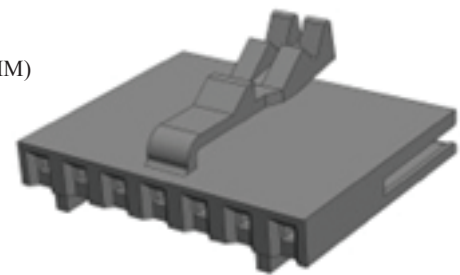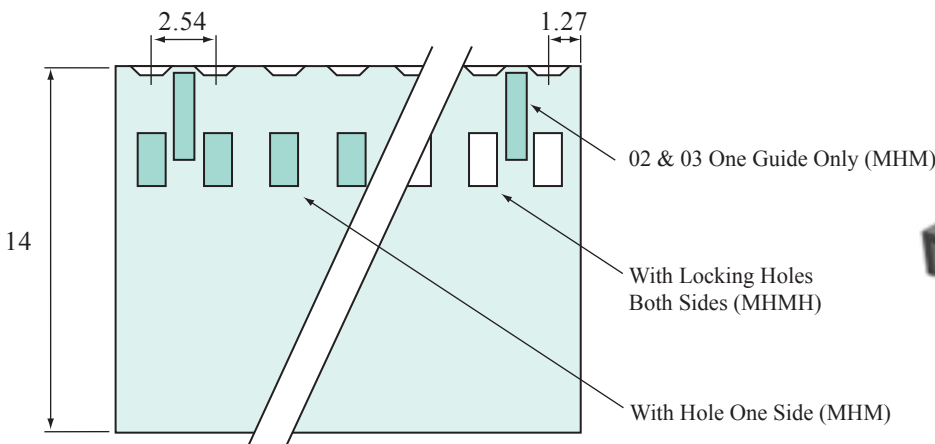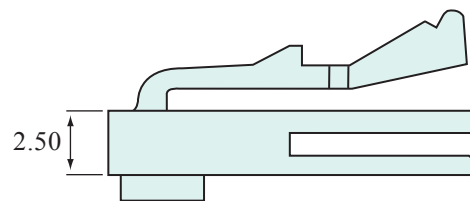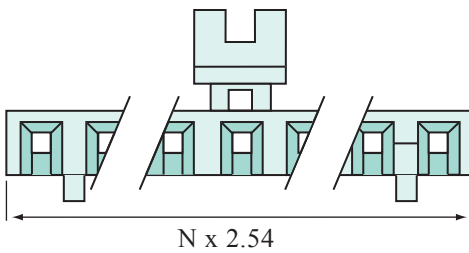

Unit : mm

MHM (Locking Hole 1 side)
MHMH(Locking Holes both sides)

Series

XX

**No of Ways : MHM 2-25
: MHMH 4-25**

MEMCON (Asia) Limited
Units 5/6 6/F Westley Square
48 Hoi Yuen Rd Kwun Tong Hong Kong
T +852 3741 1411 F +852 3747 8980
www.memcon.asia sales@memcon.asia

MEMCON Limited
Unit 8 Campus Five Third Avenue LETCHWORTH
Hertfordshire SG6 2JF United Kingdom
T +44 1462 371477 F +44 1462 677499
www.memcon.eu sales@memcon.eu
MEMCON® is a registered trade mark of Memcon Limited

MEMCON North America
6000 Red Arrow Hwy Unit I
Stevensville Michigan 49127 USA
T +1 269 281 0478 F +1 269 593 5952
www.memcon.net sales@memcon.net