



Technical Characteristics

Material : PBT UL94-VO
Insulation Resistance : 1,000MΩ min
Voltage Rating : 250V AC, DC
Current Rating : 1A AC, DC
Temperature Range : -25°C ~+85°C
Withstand Voltage : 800V AC/minute
Colour : Black or White

RoHS Compliant, Lead Free :



3D Image :

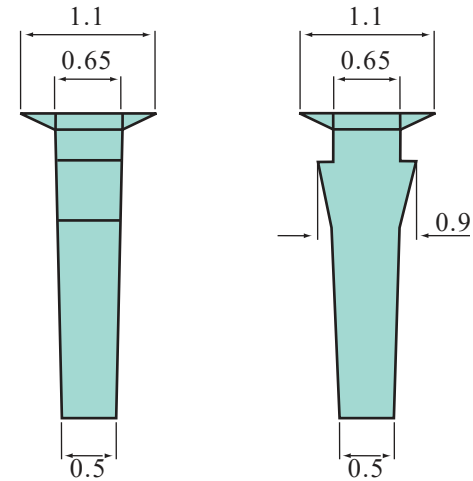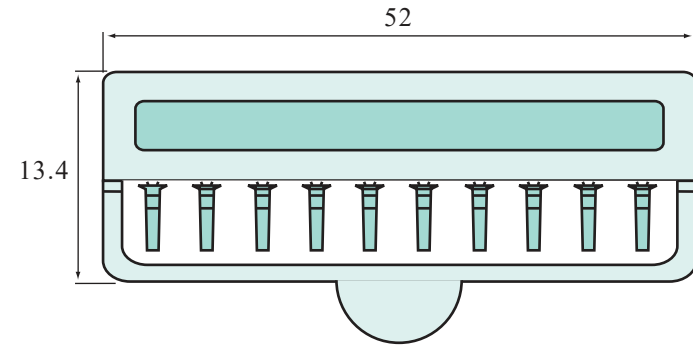

 **MEMCON Limited**
 Unit 8 Campus Five Third Avenue Letchworth Hertfordshire SG6 2JF
 United Kingdom T +44 (0)1462 371477 F +44 (0)1462 677499
www.memcon.eu sales@memcon.eu

General Tolerance : +/- 0.20 Unit : mm

PART NO: MPK101-X	DRAWING NO:	REV	DATE	DRAWN	CHECKED	APPROVED	CUSTOMER IF APPLICABLE
		B	04/01/23	ER	AB	PC	
DESCRIPTION: Polarizing Key	This document and drawings contains proprietary information which are the property of the Company and shall not be employed, copied, reprinted or disclosed to a third party in any manner, either wholly or in part, without the prior written consent of the Company						DO NOT SCALE DRAWING DIMENSIONS MM