

1.27mm Pin Headers

2-40 Ways Available

Mates with MH544 Series Housings

Contact 0.40mm Square Pin

Temperature Range -40°C to +150°C

Current Rating 3A AC, DC


Withstand Voltage 500AC

UL 94VO Black Polyester Insulator

Tin or Gold Plating Available

Insulation Resistance 1,000M Ω

RoHS Compliant

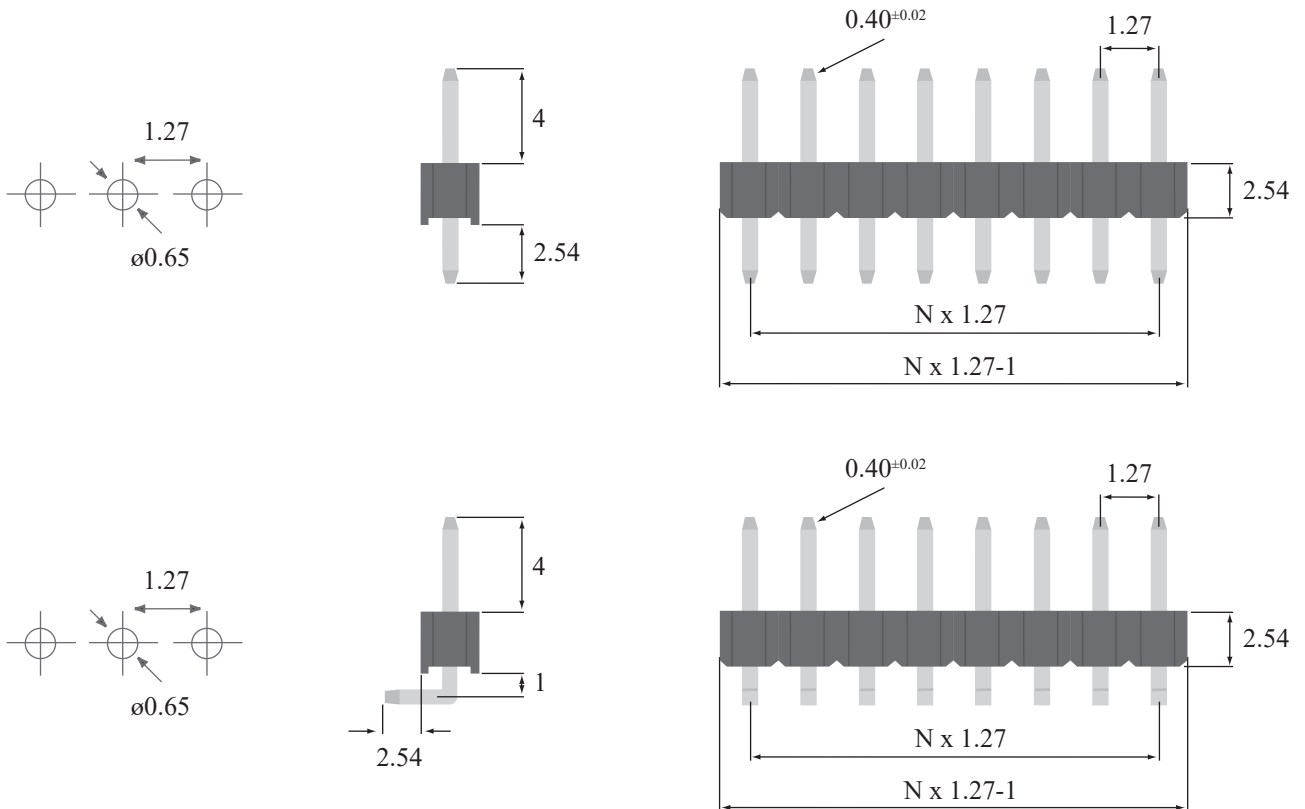

Unit mm

