

TRIANGLE DOME with DIMPLE & FEET

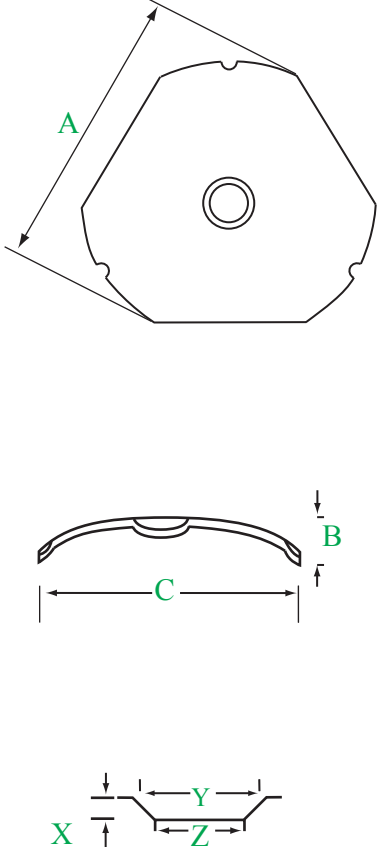
Stable Forces per Batch Number
 Excellent Tactile Effect
 100% Traceability per Batch Number
 Ideal for PCB Mounting

Used in a multitude of Industries, such as:
 Membrane Switch, Automotive, Consumer
 Electronics, Medical, Appliance, etc

RoHS Compliant



Contact Configuration	SPST, Normally Open	Contact Resistance	<100 ohms
Contact Bounce (on)	<0.3ms	with Gold or Silver Plating	<1 ohm
Contact Bounce (off)	<6ms	Voltage/Current Maximum	12mA @ 24 Volts DC, RL
Operating Temperature	-55°C to 125°C	Breakdown Voltage	Over 200 Volts
Storage Temperature	-55°C to 125°C	Material	Stainless Steel Type 304
Humidity	0-97% (no condensation)	Life Expectancy	1 Million

	Part No	Force	Size	Dimensions						
				Thickness	A	B	C	X	Y	Z
	MD 5 - TDF - 160	160	5mm	0.06	6.00	0.43	4.55	0.06	1.20	1.00
	MD 6 - TDF - 300	300	6mm	0.08	6.00	0.52	5.20	0.06	1.20	1.00
	MD 6 - TDF - 350	350	6mm	0.08	6.00	0.51	5.20	0.06	1.20	1.00
	MD 6 - TDF - 400	400	6mm	0.08	6.00	0.57	5.20	0.06	1.20	1.00
	MD 7 - TDF - 200	200	7mm	0.08	7.00	0.44	6.25	0.06	1.20	1.00
	MD 7 - TDF - 230	230	7mm	0.08	7.00	0.47	6.25	0.07	1.20	1.00
	MD 8 - TDF - 240	240	8mm	0.08	8.00	0.52	7.25	0.08	1.60	1.40
	MD 8 - TDF - 280	280	8mm	0.08	8.00	0.55	7.25	0.08	1.60	1.40
	MD 8 - TDF - 350	350	8mm	0.08	8.00	0.58	7.25	0.08	1.60	1.40
	MD 8 - TDF - 380	380	8mm	0.08	8.00	0.65	7.25	0.08	1.60	1.40
	MD 8 - TDF - 450	450	8mm	0.08	8.00	0.65	7.25	0.08	1.60	1.40
	MD 9 - TDF - 150	150	9mm	0.08	9.00	0.47	8.25	0.08	1.60	1.40
	MD 9 - TDF - 240	240	9mm	0.08	9.00	0.54	8.25	0.06	1.60	1.40
	MD 9 - TDF - 280	280	9mm	0.08	9.00	0.59	8.25	0.08	1.60	1.40
	MD 9 - TDF - 350	350	9mm	0.08	9.00	0.62	8.25	0.08	1.60	1.40
	MD 9 - TDF - 400	400	9mm	0.08	9.00	0.66	8.25	0.08	1.60	1.40
	MD 9 - TDF - 450	450	9mm	0.08	9.00	0.73	8.25	0.08	1.60	1.40
	MD 9 - TDF - 480	480	9mm	0.10	9.00	0.67	8.25	0.08	1.60	1.40
	MD 10 - TDF - 180	180	10mm	0.08	10.00	0.53	9.25	0.08	1.60	1.40
	MD 10 - TDF - 240	240	10mm	0.10	10.00	0.53	9.25	0.08	1.60	1.40
MD 10 - TDF - 280	280	10mm	0.10	10.00	0.55	9.25	0.07	1.60	1.40	
MD 10 - TDF - 350	350	10mm	0.10	10.00	0.57	9.25	0.08	1.60	1.40	
MD 10 - TDF - 400	400	10mm	0.10	10.00	0.59	9.25	0.08	1.60	1.40	
MD 10 - TDF - 550	550	10mm	0.10	10.00	0.70	9.25	0.08	1.60	1.40	
MD 12 - TDF - 240	240	12mm	0.12	12.00	0.59	11.20	0.08	1.60	1.40	
MD 12 - TDF - 280	280	12mm	0.12	12.00	0.62	11.20	0.08	1.60	1.40	
MD 12 - TDF - 350	350	12mm	0.12	12.00	0.65	11.20	0.08	1.60	1.40	
MD 12 - TDF - 400	400	12mm	0.12	12.00	0.66	11.20	0.08	1.60	1.40	