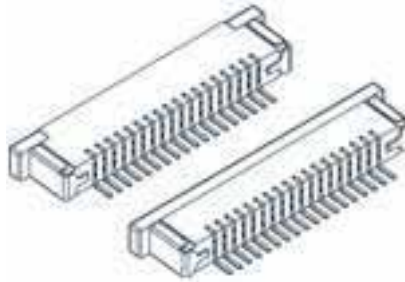


1.0mm FPC/FFC SMD Bottom Contact ZIF Connector

Specifications:

Current Rating : 1.0 Amp Max
 Voltage Rating : 125V Max
 Contact Resistance : 20m Ω Max
 Insulator Resistance : 100M Ω Min
 Withstanding Voltage : 500VAC for 1 Min
 Operating Temperature Range : -20°C ~+105°C

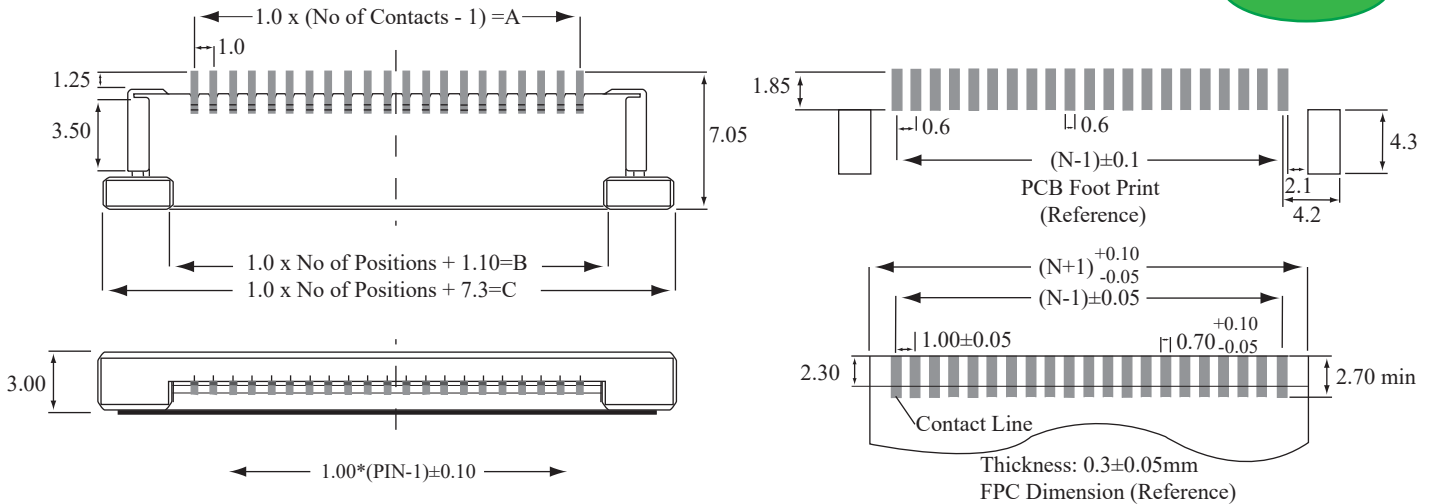

Packaging:

Standard : Tube
 Upon Request : Tape & Reel
 (Add T/R to end of Part No)

Material and Finish:

Contact : Phosphor Bronze
 Insulator : High Temperature Nylon 6T
 Plating : Tin

RoHS Compliant



Part No	Circuits	A	B	C	Part No	Circuits	A	B	C
MZC100-04-BC	4	3.0	5.1	11.4	MZC100-28-BC	28	27.0	29.1	35.4
MZC100-05-BC	5	4.0	6.1	12.4	MZC100-29-BC	29	28.0	30.1	36.4
MZC100-06-BC	6	5.0	7.1	13.4	MZC100-30-BC	30	29.0	31.1	37.4
MZC100-07-BC	7	6.0	8.1	14.4	MZC100-31-BC	31	30.0	32.1	38.4
MZC100-08-BC	8	7.0	9.1	15.4	MZC100-32-BC	32	31.0	33.1	39.4
MZC100-09-BC	9	8.0	10.1	16.4	MZC100-33-BC	33	32.0	34.1	40.4
MZC100-10-BC	10	9.0	11.1	17.4	NZC100-34-BC	34	33.0	35.1	41.4
MZC100-11-BC	11	10.0	12.1	18.4	MZC100-35-BC	35	34.0	36.1	42.4
MZC100-12-BC	12	11.0	13.1	19.4	MZC100-36-BC	36	35.0	37.1	43.4
MZC100-13-BC	13	12.0	14.1	20.4	MZC100-37-BC	37	36.0	38.1	44.4
MZC100-14-BC	14	13.0	15.1	21.4	MZC100-38-BC	38	37.0	39.1	45.4
MZC100-15-BC	15	14.0	16.1	22.2	MZC100-39-BC	39	38.0	40.1	46.4
MZC100-16-BC	16	15.0	17.1	23.4	MZC100-40-BC	40	39.0	41.1	47.4
MZC100-17-BC	17	16.0	18.1	24.4	MZC100-41-BC	41	40.0	42.1	48.4
MZC100-18-BC	18	17.0	19.1	25.4	MZC100-42-BC	42	41.0	43.1	49.4
MZC100-19-BC	19	18.0	20.1	26.4	MZC100-43-BC	43	42.0	44.1	50.4
MZC100-20-BC	20	19.0	21.0	27.4	MZC100-44-BC	44	43.0	45.1	51.4
MZC100-21-BC	21	20.0	22.1	28.4	MZC100-45-BC	45	44.0	46.1	52.4
MZC100-22-BC	22	21.0	23.1	29.4	MZC100-46-BC	46	45.0	47.1	53.4
MZC100-23-BC	23	22.0	24.1	30.4	MZC100-47-BC	47	46.0	48.1	54.4
MZC100-24-BC	24	23.0	25.1	31.4	MZC100-48-BC	48	47.0	49.1	55.4
MZC100-25-BC	25	24.0	26.1	32.4	MZC100-49-BC	49	48.0	50.1	56.4
MZC100-26-BC	26	25.0	27.1	33.4	MZC100-50-BC	50	49.0	51.1	57.4
MZC100-27-BC	27	26.0	28.1	34.4					