


# DOUBLE SIDED TISSUE TAPE

Our range of adhesive products have been specifically developed for use in the label, name plate, membrane switch, front panel, flexible circuits, EL, sensors and other applications that require high performance adhesives.

Developed for use in the harshest of conditions, our tapes demonstrate outstanding resistance to hostile environments.

Our Double Sided Tapes are ideal for use in metal or plastic name plate style and associated applications. The range of high performance Double Sided Tapes provide a high level of adhesion together with good holding power. They also exert excellent temperature and repulsion resistance.

The MDST series tapes provide a high quality product at a price positioned to help our customers compete in this competitive market.

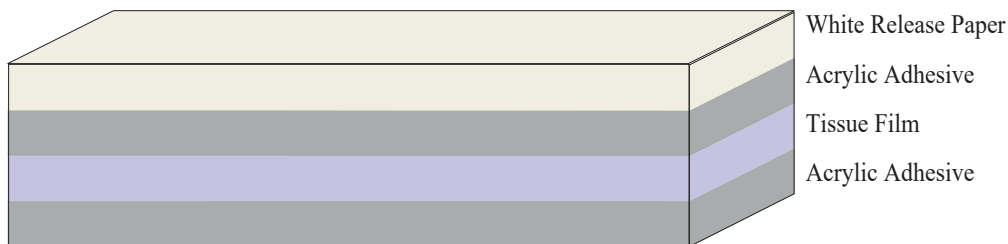

Part Number	MDST120	MDST140	MDST150
Tape Thickness, mm	0.120	0.140	0.150
Carrier Material	Tissue	Tissue	Tissue
Colour	Translucent	Translucent	Translucent
Adhesion to Steel, N/25mm (FINAT1 / ASTM/D3330M-04 / JISZ0237)	≥13	≥15	≥17
Tack, Ball Number (JISZ0237)	≥13	≥13	≥16
Holding Power (25mm x 25mm, 1kg, 25°C) (FINAT8 / ASTM/D3654M-02 / JISZ0237)	>48 Hrs	>48 Hrs	>48 Hrs

The performance characteristics are those results obtained in our laboratory.

Before adopting our products for commercial use, the user assumes responsibility for determining fitness of use in their particular application and process.

Memcon makes no warranties and assumes no liability in connection with any use of this information.